



OUR GLOBAL  
COMPETENCE  
CENTRES

 APOLLO DISPLAY  
TECHNOLOGIES



 DISTEC



 DISPLAY  
TECHNOLOGY




# Datasheet

## iBASE

### IB919


Industrial 3,5" Single-Board Computer with 8th Gen. Intel® Core™ i U-Series processor

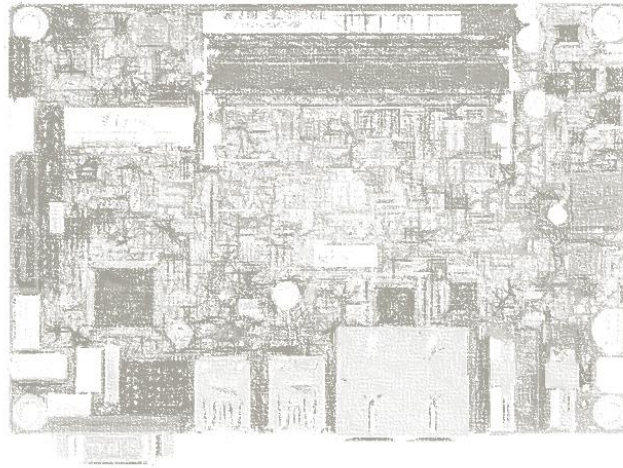

---


The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

---

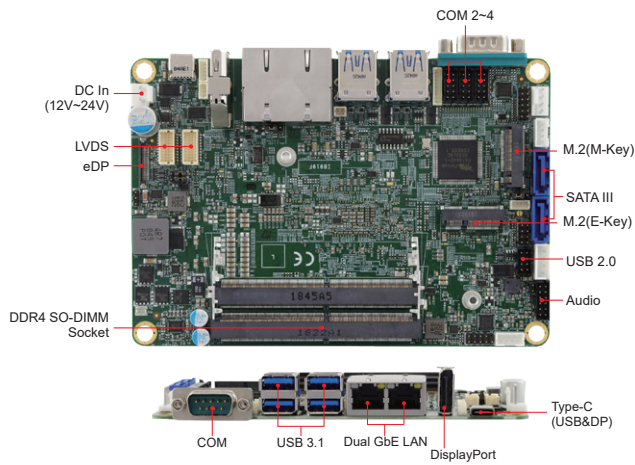

## Features

- Onboard Intel® 8th Gen Core™ / Celeron® series processor
- 2x DDR4-2400 SO-DIMM, Max.32GB, Non-ECC
- Support DisplayPort, eDP or 24-bit dual-channel LVDS
- 2x Intel® PCI-E GbE LAN
- Watchdog timer, Digital I/O, TPM (2.0)
- 2x USB 2.0, 4x USB 3.1, 2x SATA III, supports Type C
- 2x M.2 sockets (M/E-Key)



## Specifications

CPU	Intel® 8th Generation Core™ / Celeron® 4000 series
System Memory	DDR4-2400 SO-DIMM, Max. 32GB (Non-ECC)
System Chipset	Integrated in 8th Gen Intel® Core™ / Celeron® processor
BIOS	AMI
Watchdog Timer	256 levels
SSD	N/A
H/W Monitor	Yes
Expansion Slots	1x M.2 (M2280, Support NVMe) 1x M.2 (E2230, Support CNV)
VGA Controller	Intel® UHD Graphics 620
VGA Memory	Shared Memory
Display Interface	USB Type-C DisplayPort eDP or 24-bit dual channel LVDS
LAN Controller	Intel® I219LM Gigabit LAN PHY: IB919AF series Intel® I219V Gigabit LAN PHY: IB919EF series Intel® I211AT PCI-E Gigabit LAN (as 2nd LAN)
Connector	RJ-45 connectors
I/O Chipset	Fintek F81964D-I 1x RS232/422/485 (Jumperless selection) 3x RS232
USB	4x USB3.1 (Type A) 2x USB2.0 (Pin-header) 1x USB Type C
Serial ATA	2x SATA III
Audio	Built-in HD with Realtek ALC269 w/ class-D amplifier

Others	Digital I/O (4-in/4-out), EuP/ErP, +12V~+24V DC-in (+/-20%)
Dimensions	102mm x 147mm (4" x 5.8")
Power	TBD
Consumption	TBD
Operating Temperature	0°C~60°C
Storage Temperature	-20°C~80°C
Relative Humidity	90% (non-condensing@60°C)

## Ordering Information

IB919AF-8665	3.5" Intel® Core i7-8665UE (1.7GHz/4.4GHz) onboard, w/ I211AT GbE LAN + I219LM GbE LAN, USB Type C (USB 3.1+DP), VGA (DisplayPort + DP or LVDS), 2x SATA III, 4x COM, 2x M.2 (M2280 & E2230), DC-in (9V~24V), Support iAMT 11.0, TPM (2.0), Optional Heatsink, w/o cable kit, (RoHS)
IB919AF-8365	3.5" Intel® Core i5-8365UE (1.6GHz/4.1GHz) onboard, w/ I211AT GbE LAN + I219LM GbE LAN, USB Type C (USB 3.1+DP), VGA (DisplayPort + DP or LVDS), 2x SATA III, 4x COM, 2x M.2 (M2280 & E2230), DC-in (9V~24V), Support iAMT 11.0, TPM (2.0), Optional Heatsink, w/o cable kit, (RoHS)
IB919EF-8145	3.5" Intel® Core i3-8145UE (2.2GHz/3.9GHz) onboard, w/ I211AT GbE LAN + I219V GbE LAN, USB Type C (USB 3.1+DP), VGA (DisplayPort + DP or LVDS), 2x SATA III, 4x COM, 2x M.2 (M2280 & E2230), DC-in (9V~24V), EuP/ErP, TPM (2.0), Optional Heatsink, w/o cable kit, (RoHS)
IB919EF-4305	3.5" Intel® Celeron 4305UE (2.0GHz) onboard, w/ I211AT GbE LAN + I219V GbE LAN, USB Type C (USB 3.1+DP), VGA (DisplayPort + DP or LVDS), 2x SATA III, 4x COM, 2x M.2 (M2280 & E2230), DC-in (9V~24V), EuP/ErP, TPM (2.0), Optional Heatsink, w/o cable kit, (RoHS)

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

## Headquarters

### Germany



#### FORTEC Elektronik AG

Augsburger Str. 2b  
82110 Germering

Phone: +49 89 894363-0  
E-Mail: [sales@fortecag.de](mailto:sales@fortecag.de)  
Internet: [www.fortecag.de](http://www.fortecag.de)

## Fortec Group Members

### Austria



#### FORTEC Elektronik AG

##### Office Vienna

Nuschinggasse 12  
1230 Wien

Phone: +43 1 8673492-0  
E-Mail: [office@fortec.at](mailto:office@fortec.at)  
Internet: [www.fortec.at](http://www.fortec.at)

### Germany



#### Distec GmbH

Augsburger Str. 2b  
82110 Germering

Phone: +49 89 894363-0  
E-Mail: [info@distec.de](mailto:info@distec.de)  
Internet: [www.distec.de](http://www.distec.de)



#### FORTEC Elektronik AG

Lechwiesenstraße 9  
86899 Landsberg am Lech

Phone: +49 8191 91172-0  
E-Mail: [sales@fortecag.de](mailto:sales@fortecag.de)  
Internet: [www.fortecag.de](http://www.fortecag.de)

### Switzerland



#### ALTRAC AG

Bahnhofstraße 3  
5436 Würenlos

Phone: +41 44 7446111  
E-Mail: [info@altrac.ch](mailto:info@altrac.ch)  
Internet: [www.altrac.ch](http://www.altrac.ch)

### United Kingdom



#### Display Technology Ltd.

Osprey House, 1 Osprey Court  
Hichingbrooke Business Park  
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600  
E-Mail: [info@displaytechnology.co.uk](mailto:info@displaytechnology.co.uk)  
Internet: [www.displaytechnology.co.uk](http://www.displaytechnology.co.uk)

### USA



#### Apollo Display Technologies, Corp.

87 Raynor Avenue,  
Unit 1 Ronkonkoma,  
NY 11779

Phone: +1 631 5804360  
E-Mail: [info@apolloDisplays.com](mailto:info@apolloDisplays.com)  
Internet: [www.apolloDisplays.com](http://www.apolloDisplays.com)